


# CLUTCH™

## INSTALLATION INSTRUCTIONS

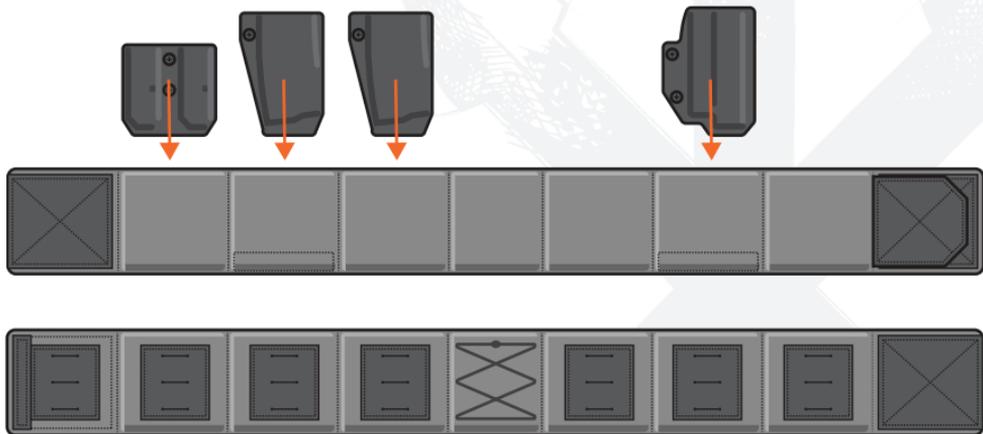

- 1** Remove existing belt loop hardware from aftermarket holsters and magazine carriers. Slide “naked” accessories into CLUTCH™ cells to check for fit.
- 2** Apply included adhesive-backed Velcro to aftermarket accessories (trim to fit) and secure assemblies in CLUTCH™ cells.
- 3** Don the belt and adjust sizing as necessary by cinching shock cord corset.
- 4** Load belt with gear and perform dry fire presentations and reloads to ensure holsters, carriers, and sheaths are placed/angled properly.

Tips / Tricks: Try to keep top edge of holsters and carriers aligned with top edge of CLUTCH™ belt for easier re-holstering.

Belt can be rotated around waist for hip or appendix carry.