

INSTALLATION INSTRUCTIONS

FAST™

FTC OMNI



 **UNITY™**


CONTENTS



PRODUCT OVERVIEW

The FAST™ FTC OMNI magnifier mount positions a variety of popular magnifiers from various manufacturers to a 2.26" optical centerline from the rail. It employs a simple force-to-overcome mechanism, stowing the magnifier below the optical sight plane and completely within the footprint of the weapon's receiver when not in use.

One (1) FAST™ FTC OMNI



Two (2) Magnifier Mounting Screws (EOTech®)



One (1) Sig Sauer® JULIET Adapter



Four (4) Magnifier Mounting Screws (Sig Sauer®)





WARNING: ENSURE FIREARM IS UNLOADED



CAUTION:

OVER-TORQUING FASTENERS CAN DAMAGE YOUR MOUNT AND/OR YOUR OPTIC AND WILL VOID YOUR WARRANTY. USING THREAD LOCKING COMPOUNDS, SUCH AS LOCTITE® OR OTHERS, IS NOT RECOMMENDED AND WILL VOID YOUR WARRANTY.


1

Up-end and seat Magnifier in FAST™ mount arm (do not use shims from OEM magnifier kits). Insert the included two large Magnifier Mounting Screws in EOTech®, Trijicon® or Vortex® optics. Insert the included four small Magnifier Mounting Screws and the JULIET Adapter in Sig Sauer® optics. Secure large screws using a T20 bit driver. Secure small screws using a T10 bit driver. Lightly snug all screws before applying final torque to any. **Torque large screws to 35 in-lbs (4 Nm). Torque small screws to 13 in-lbs (1.5 Nm).**




NOTE

Do not adjust the Pivot Bolt or disassemble the mount. Doing so will void the warranty.

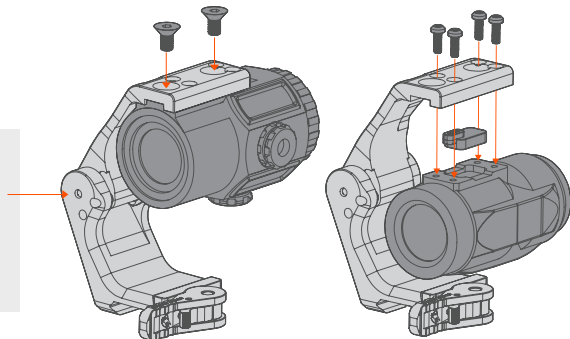

2

The FAST™ FTC OMNI mount uses a force-to-overcome mechanism. Grasp the magnifier body and pivot assembly down to the stowed position. Repeat in reverse to bring the magnifier back into the active position.

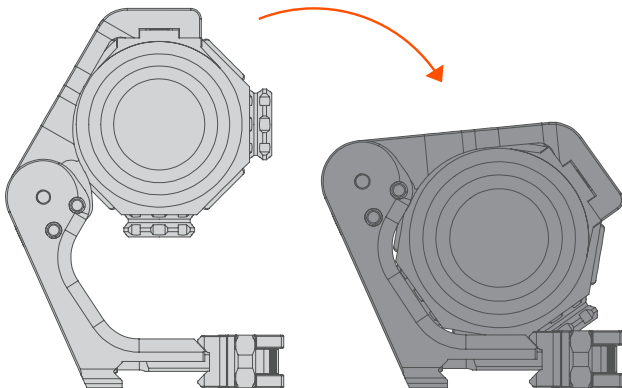

INFO@UNITYTACTICAL.COM

©2023 UNITY Tactical. All Rights Reserved.
Specifications subject to change without notice. PAT: UTIP.CO

